



Please inspect the product immediately upon receipt for transit damage, missing packs/parts or manufacturing faults. Damage reported later cannot be accepted. Please handle the product with care avoiding knocks and shock loading to all sides and edges of glass.

Damaged glass or missing parts will not be replaced under warranty if the installation process has begun.

NOTE: SAFETY GLASS CANNOT BE REWORKED

Please read these instructions carefully before you start installation. Special care should be taken when drilling walls to avoid hidden pipes or electrical cables.

Securing into a stud or timber brace is highly recommended, if unable to do so, other secure means of fixing must then be considered.


AFTER CARE INSTRUCTIONS

This shower screen has been treated with EnduroShield® easy-to-clean glass surface treatment. Please follow the care instructions affixed to the door panel to ensure that your treatment is long lasting.


After use, your shower should be cleaned with soap and water. This is particularly important in hard water districts where insoluble lime salts may be deposited and allowed to build up. Cleaners of a gritty nature should not be used. Care should be taken to avoid contact with strong chemicals such as organic solvents and strippers. Glass cleaners can be used but with caution. If in doubt please contact the manufacturer of the cleaner in question.


Please keep these instructions for aftercare and customer service details.

TOOLS REQUIRED

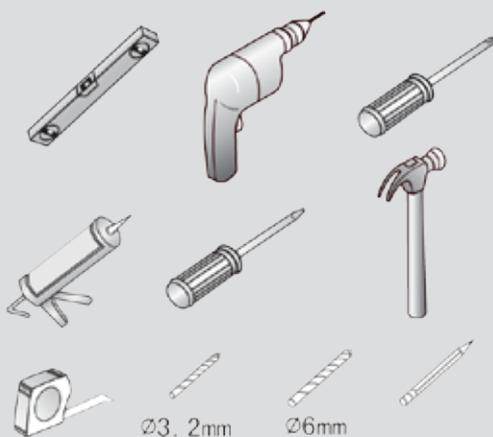

This product is heavy and awkward to handle and two person installation is recommended.



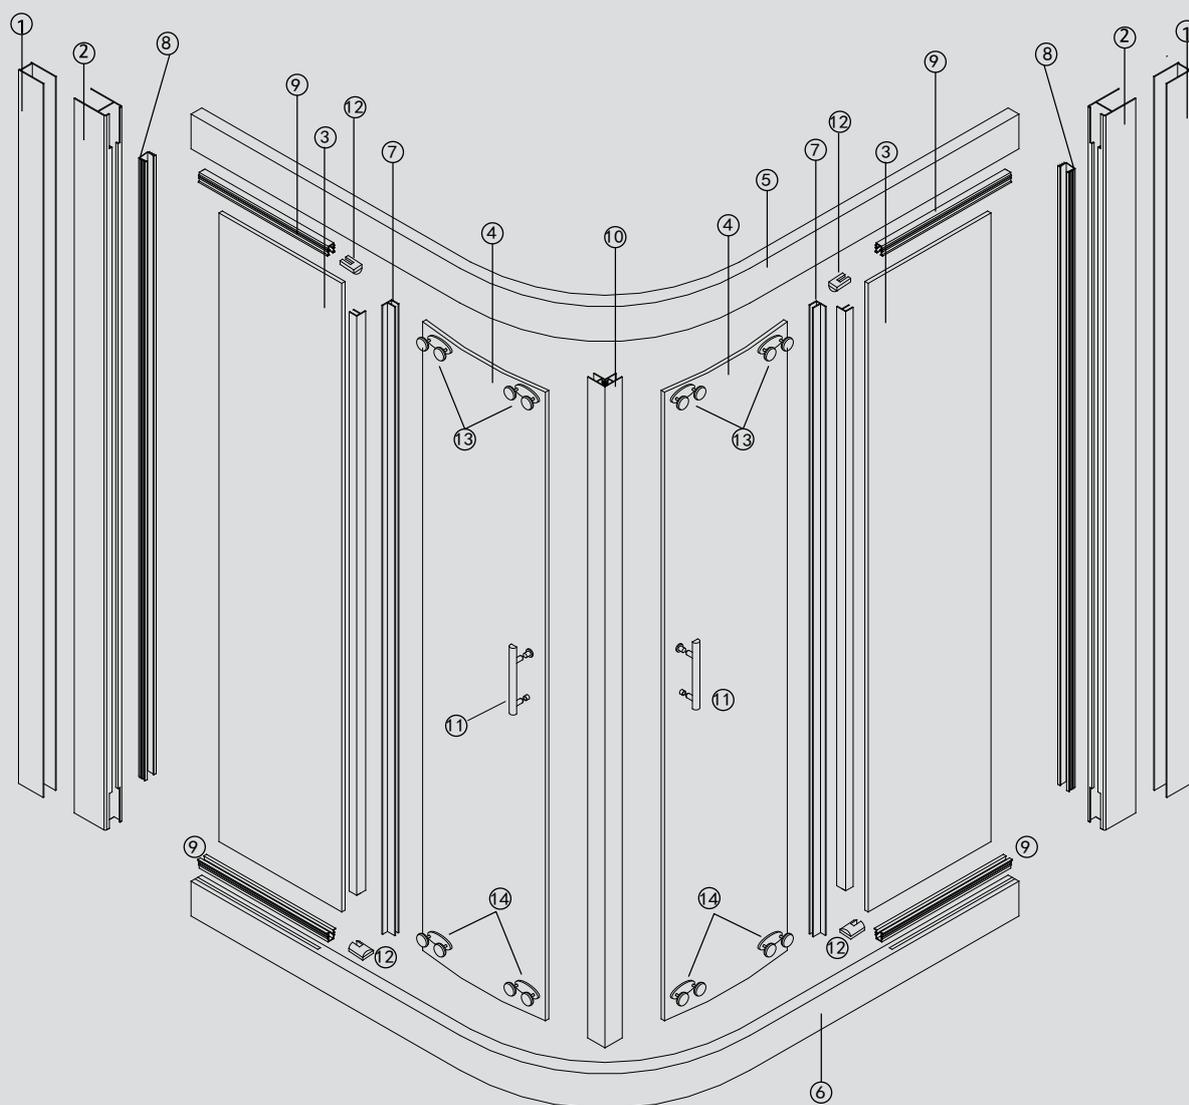


- | | | |
|-------------------------------|---------------------------------|----------------------------------|
| 1. 2 x Wall jambs | 7. 4 x Sealing strips | 13. 4 x Top roller assemblies |
| 2. 2 x Fixed panel extrusions | 8. 2 x Fixed panel seal - long | 14. 4 x Bottom roller assemblies |
| 3. 2 x Fixed panels | 9. 4 x Fixed panel seal -short | |
| 4. 2 x Sliding doors | 10. 2 x Magnetic sealing strips | |
| 5. 1 x Top rail | 11. 2 x Handle assemblies | |
| 6. 1 x Bottom rail | 12. 4 x Fixed panel and blocks | |

daintree curved shower screen


INSTALLATION GUIDE

- 1** Note: Pre-assembly of screen is required. Make sure this is done in a clean and litter free space so screen does not get damaged

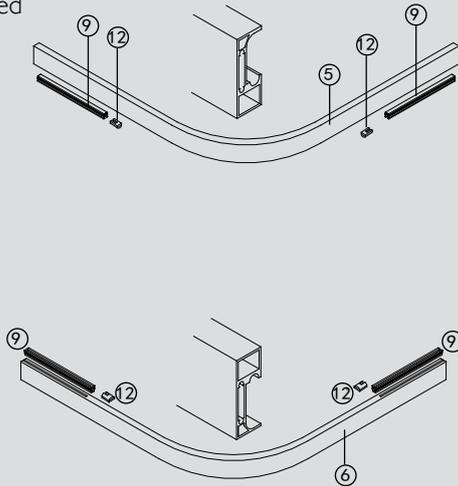


Insert fixed panel end block(12) first then short fixed panel seal(9) into slot on both bottom and top rails(5)(6). (Usually comes preinstalled in top and bottom rail.)

2

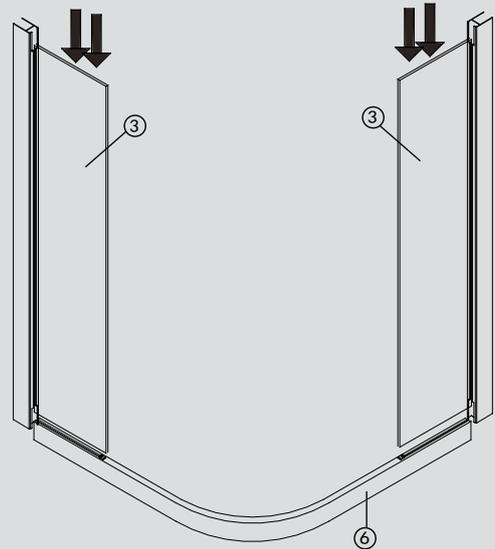


Push fixed panels(3) into seal that is located in the bottom rail(6). Make sure that the panel is firmly up against the fixed panel block(12) and fully inserted into the short seals(9). Hint-Wet the edge of glass & seal to make it easier to insert panel.

3

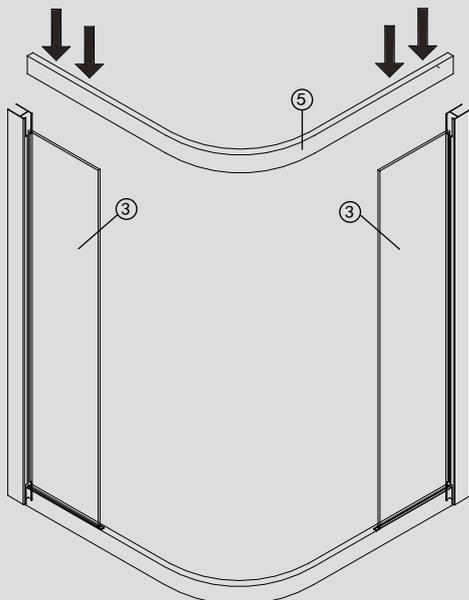

Push fixed panels(3) into seal that is located in the top rail(5). Make sure that the panel is firmly up against the fixed panel block(12) and fully inserted into the short seals(9). Hint-Wet the edge of glass and seal to make it easier to insert panel.

4

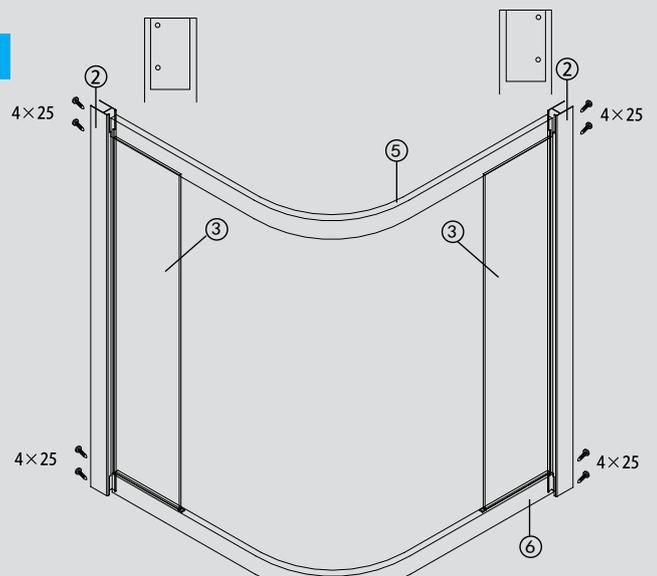


Screw the fixed panel extrusion(2) to the top and bottom rails. Please make sure that the location of the screw holes in the fixed panel extrusion line up with the holes in the top and bottom rails.

daintree curved shower screen

IMPORTANT INFORMATION

5

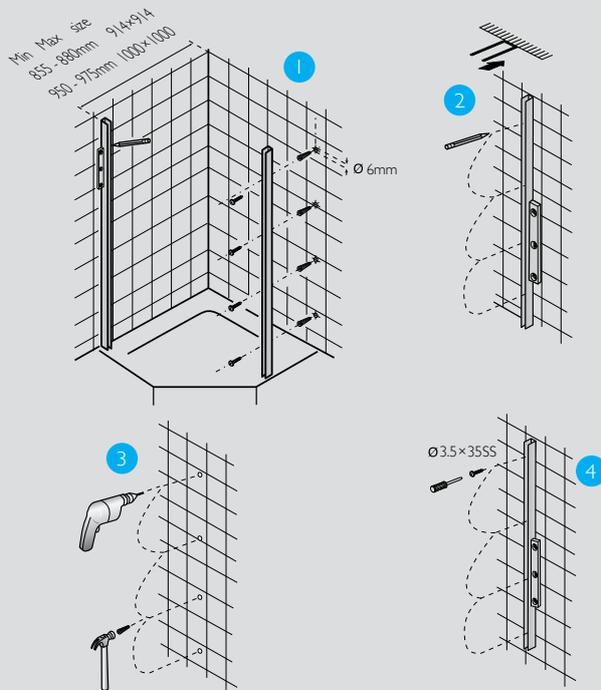


1 Measure your shower base/shower area. The measurement to the outside edge of the wall jambs(1) should be somewhere within the min and max size of the screen.

Min	Max	Screen Size
855mm	880mm	914×914mm
950mm	975mm	1000×1000mm

If you are using the maximum size make sure that you allow for walls that may be out of plumb. If your walls are 10mm out of plumb reduce your screen area by this amount.


- 2 Use a level ensure jambs (1) are plumb then mark the outside edges with pencil. Recheck measurements.
 - 3 Remove jambs and drill 6mm holes with drill bit. Insert the plastic wall plugs.
- Note: Please use the right fixing for the surface you are screwing into to ensure that the jamb is fixed securely to the wall. eg: toggle wall plug.
- 4 Using a level ensure jambs (1) are plumb and the holes in the jamb line up with the holes in the wall. Fix jamb to wall using the screws provided.

6

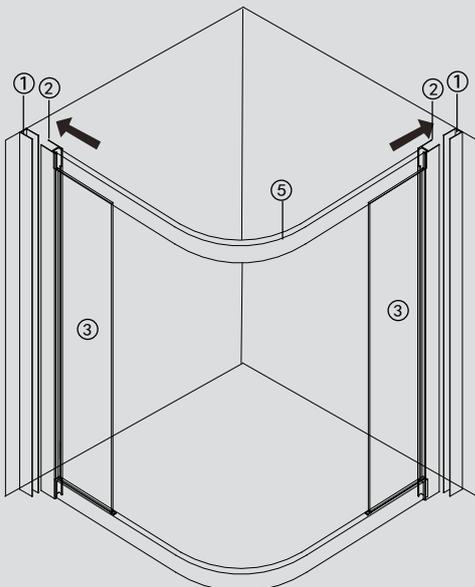


Adjust fixed panel extrusions(2) in or out on the wall jambs(1) so that the top rail(5) is horizontal and the whole screen sits square on the shower base/shower area.(B=C=D)

7

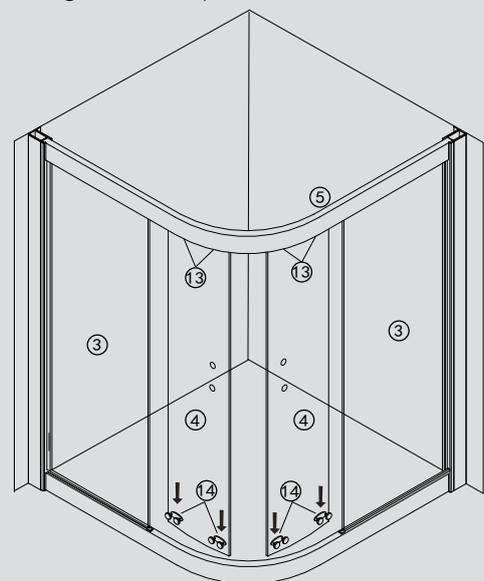


Adjust the sliding doors(4) using the screws located on the bottom of top roller assemblies(13). Adjust rollers so that the sliding doors (4) are parallel to the fixed panels(3) and parallel to each other. Note: Do not overtighten top rollers as this will cause the bottom rollers to jamb and or break.

8

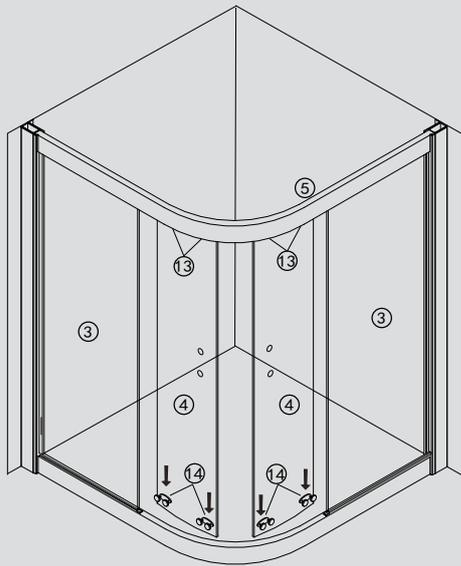


Clip the bottom of the door into the bottom rail(6). The rollers(14) are pressed down to allow the rollers clip to be into the rail.

9

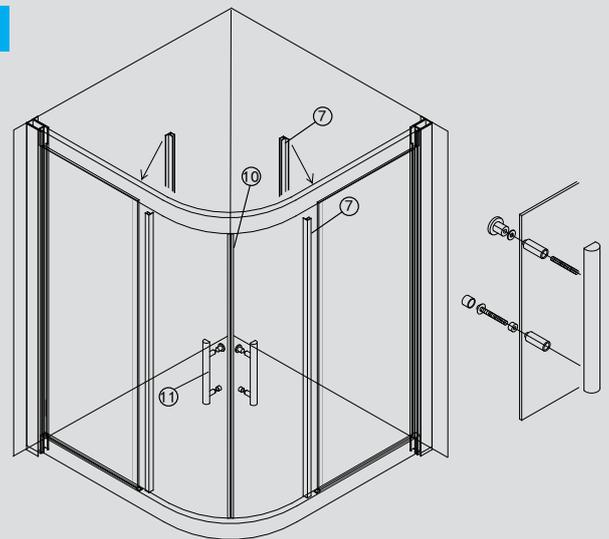


Gently knock the sealing strips(7) onto the fixed panels and doors. Attach the door handles(11) to the sliding doors making sure there is a washer between the glass and the handle. Gently knock the magnetic sealing strip(10) onto the sliding doors.

10

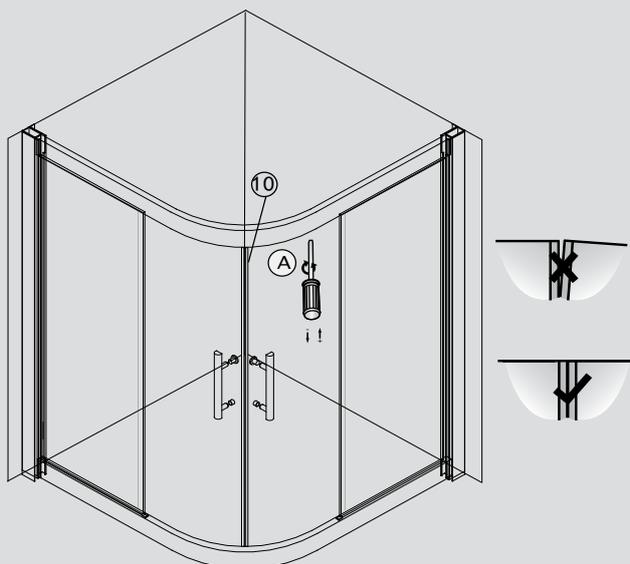


Adjust the sliding doors(4) using the screws located on the bottom of top roller assemblies(13). Adjust rollers so that the sliding doors (4) are parallel to the fixed panels(3) and parallel to each other. Note: Do not overtighten top rollers as this will cause the bottom rollers to jamb and or break.

11

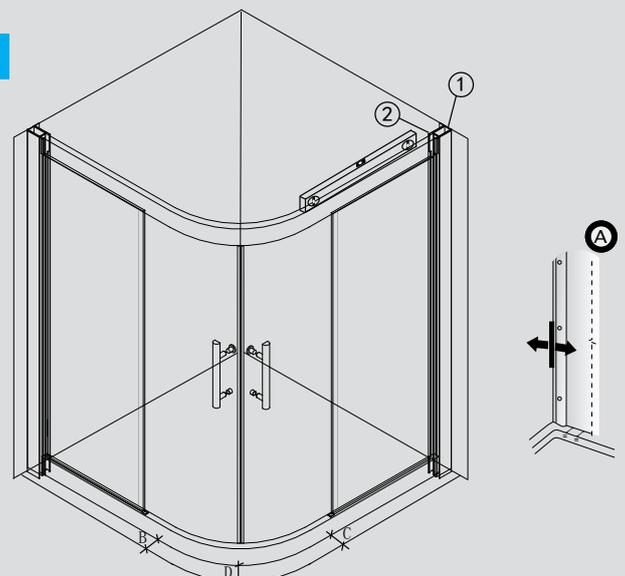


Adjust fixed panel extrusions(2) in or out on the wall jambs(1) so that the top rail(5) is horizontal and the whole screen sits square on the shower base/shower area. (B=C=D)

12

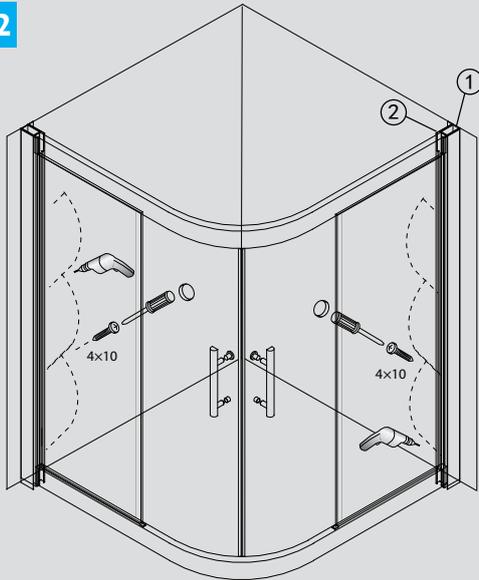

Drill 4 equally spaced holes on the inside of the screen. Fix off wall jambs(1) to the fixed panel extrusion(2) using the screws supplied. Cap all screws.

13

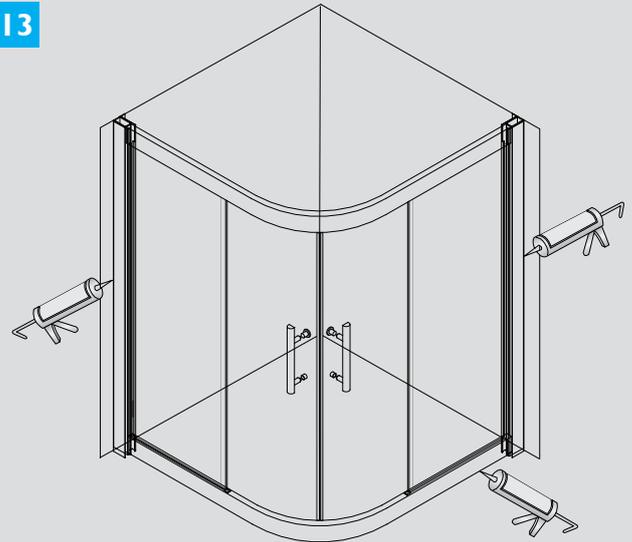

Apply silicone sealer around all external joints of shower screen and **allow 24 hours for silicone to set.**

Do not silicone inside the shower screen.

CAUTION

- The installation of the shower screen must be done according to the installation instructions, Failure to do so will void your warranty and may cause you physical harm.
- Always inspect and count parts supplied before installing as warranty may be voided on certain components once installation has begun.
- Ensure that all walls are plumb and the shower base is flat and level before installing shower screen.
- Glass components are easily damaged so extreme care should be taken when handling them.
- Damaged glass will not be replaced under warranty if the installation process has begun.
- Do not hang heavy items on shower screen as they may damage your screen.
- If you silicone the inside of screen you will void your warranty.

Note: Do not use chemicals such as acid or alkaline solvents or harsh abrasive compounds on your shower screen as they may damage the screen and void your warranty.

daintree curved shower screen

**FOR FURTHER INFORMATION PLEASE
CONTACT YOUR NEAREST GEMINI OFFICE:**

HEAD OFFICE (SYDNEY)

2/97 Banksia St, Botany, NSW 2019
T 1300 717 717 F 1300 746 480

MELBOURNE

31 Koornang Rd, Scoresby, VIC 3179
T 1300 717 717 F 1800 225 315

BRISBANE

1/477 Newman Rd, Geebung, QLD 4034
T 1300 717 717 F 1300 746 480

PERTH

27 Harris Rd, Malaga, WA 6090
T 1300 717 717 F 1800 225 315

ADELAIDE

Rep: Terry Hayes
T 0499 221 201 F 1800 225 315

HOBART

Rep: Bob Moore
T 0428 223 116 F 1800 225 315

DUBBO

Rogers Agencies
6 Richard Ryan Pl, Dubbo NSW 2830
T 1300 717 717 F 1300 746 480

EMAIL sales@gemini-industries.net

WARRANTY INFORMATION

This warranty is provided by:
Gemini Industries Pty Ltd
(ABN 87 079 297 617)

2/97 Banksia St
Botany NSW 2019
P 1300 717 717
F 1300 746 480
E sales@gemini-industries.net

Gemini Industries provides a 1 year parts and labour product warranty, subject to correct installation procedure and a 2 year product replacement warranty.

Visit www.gemini-industries.net to view full warranty terms.

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for the major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

ENDUROSHIELD® WARRANTY

To activate your warranty for EnduroShield®, enter the code affixed to the door panel, at www.enduroshield.com/warranty.

www.gemini-industries.net