


TOILET SEAT INSTALLATION INSTRUCTIONS


These instructions are for 'Life Assist' Toilet seat

1. BEFORE INSTALLATION

- Before installation check that the seat and the hinge bolts are a suitable fit on the toilet bowl.
- Please red these instructions carefully to ensure trouble-free fitting of the seat.
- · Please retain the instructions for future reference

2. MAINTENANCE





- · Regularly wipe the seat using a damp cloth and mild detergent
- For convenience the seat may be removed by depressing the two hinge buttons and lifting the seat up (see Diagram 6 on the next page).
- With the seat removed, the area around the hinge mounts can be easily cleaned.
- Avoid spilling cosmetics and solvents as this can permanently stain the surface finish
- Periodically check the tightness of the hinge fixing screws.

3. CAUTIONS






Do not clean the seat or cover with strong chemical cleaners, scouring abrasives or stiff brushes as these may ruin the polished surface.



Do not place heavy objects on the cover and avoid dropping items onto the seat.



Where possible avoid installing in locations subject to strong sunlight or high temperature.

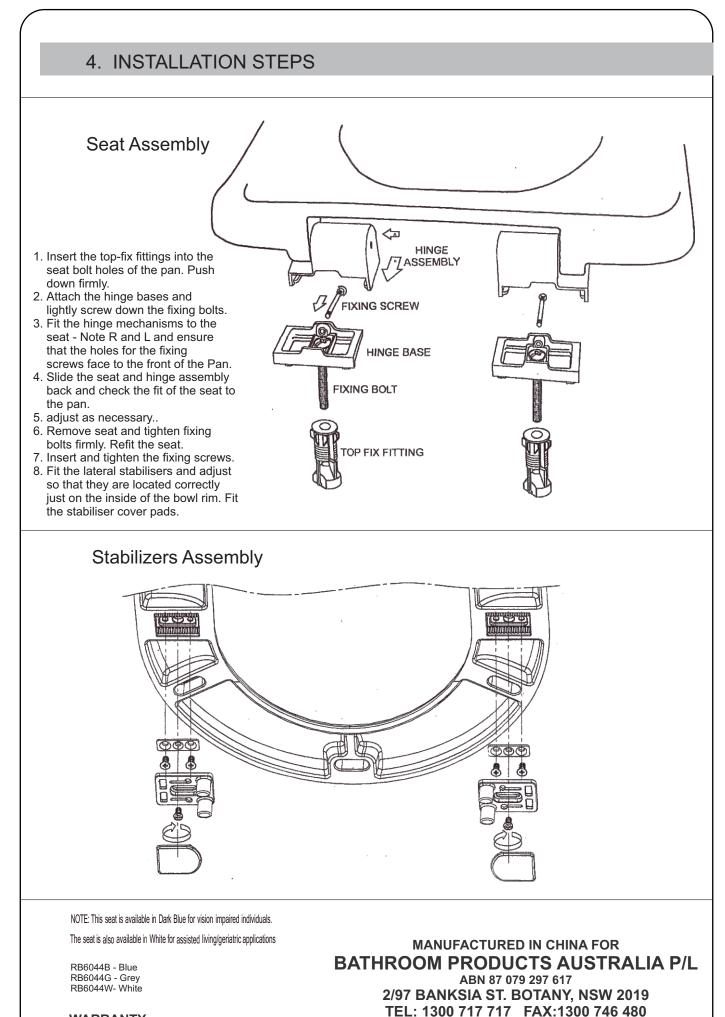

WARRANTY Visit www.johnsonsuisse.com.au for terms and conditions

R1.0

www.johnsonsuisse.com.au